


# 6kW Inverter

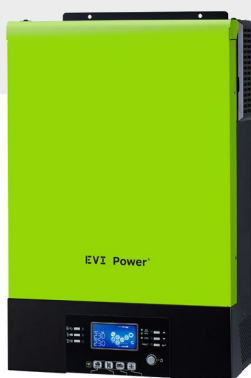

- Maximum PV input current 27A
- Dual outputs for smart load management
- Detachable LCD control module with multiple communications
- Wide DC input range
- Built-in WiFi for mobile monitoring (App is available)
- Supports USB On-the-Go function
- Reserved communication port for BMS (RS485)
- Smart battery charger design for optimized battery performance
- Battery independent function
- Parallel operation up to 9 units

## Inverter Specification

MODEL	EVI-SHI6000P
<b>RATED POWER</b>	6000VA/6000W
<b>INPUT</b>	
Voltage	230 VAC
Selectable Voltage Range	170-280 VAC (For Personal Computers) 90-280 VAC (For Home Appliances)
Frequency Range	50 Hz/60 Hz (Auto sensing)
<b>OUTPUT</b>	
AC Voltage Regulation (Batt. Mode)	230 VAC $\pm$ 5%
Overload Capacity	5s@ $\geq$ 150% load; 10s@110%~150% load
Efficiency (Peak)	90%
Transfer Time	10 ms (For Personal Computers) 20 ms (For Home Appliances)
Waveform	Pure sine wave
<b>BATTERY</b>	
Battery Voltage	48 VDC
Floating Charge Voltage	54 VDC
Overcharge Protection	66 VDC
<b>SOLAR CHARGER &amp; AC CHARGER</b>	
Solar Charger Type	MPPT
Maximum PV Array Power	6000W
MPPT Range @ Operating Voltage	120 ~430 VDC
Maximum PV Array Open Circuit Voltage	500 VDC
Maximum PV Input Current	27A
Maximum Solar Charge Current	120 A
Maximum AC Charge Current	120 A
Maximum Charge Current	120 A
<b>PHYSICAL</b>	
Dimension, D x W x H (mm)	140 x 295 x 468
Net Weight (kgs)	12.0
Communication Interface	USB, RS232, RS485, WiFi
<b>ENVIRONMENT</b>	
Humidity	5% to 95% Relative Humidity (Non-condensing)
Operating Temperature	-10°C to 50°C
Storage Temperature	-15°C to 60°C

Product specifications are subject to change without further notice.