EVI Power®

Uninterrupted Power Supply

with Power Saver Function



3000VA

- Line Interactive Technology
- LCD Display
- Moniotirng & Control Software included
- Cold Start Function
- Intelligent Battery Management
- Built in Boost and Buck AVR
- 4 Universal Outlets

AVR Function

Built in automatic voltage regulation module corrects moderate voltage fluctuations. This will provide a layer of protection to your connected equipment.

Intelligent Battery Charging


Float charging technology extends the lifespan of the UPS batteries.


Monitoring and Control Sftware

With the built in USB port and included software you can monitor and control the UPS, features includes - Input voltage, output voltage, battery charge, UPs load, logs, battery status, self test, computer shutdown, email notifactions and many more.

www.evi-networks.dk

EVI Power®

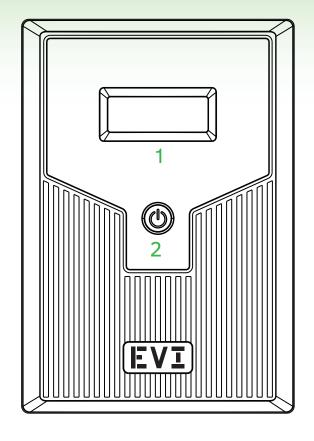

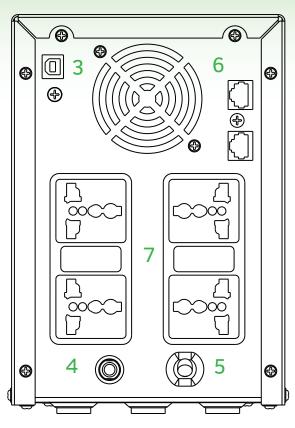

- 1 Display
- 2 On/Off botton

- 6 Fan
- 7 4 Multi sockets

SPECIFICATIONS

Model	EP-UPS3000UU4- UK
Voltage Amperes (VA)	3000VA/1800W
Input	
AC input voltage (rating)	230V
Input voltage tolerance range	140V - 300V
Output	
DATA	USB communication port
Output	4 Universal Outlets
AC output voltage (rating)	230V
AC output voltage tolerance	-7% to + 15% (battery mode)
Batteries	
Nominal voltage (Vdc)	12V DC
Number x capacity (Ah) of batteries	4 x 9Ah
Туре	Sealed lead acid, maintenance free
Battery recharge time for 90% capacity	6-8 hours (approx)
Autonomy: runtime with a PC	≥60 min (depending on load)
Standards	
Safety	IEC 62040-1
Electromagnetic compatibility	IEC 62040-2
Warranty	
UPS	2 Years
Battery	1 Year